



POLICON
Engineering & Manufacturing

Installation of patterning of tubing pipes


Installation of patterning of tubing pipes



Description

The installation of patterning of tubing pipes is designed to control the curvature and internal diameter of tubing pipes.

The installation is used in combination with other equipment in technological lines for the repair of tubing pipes, and can also be used independently outside production lines.

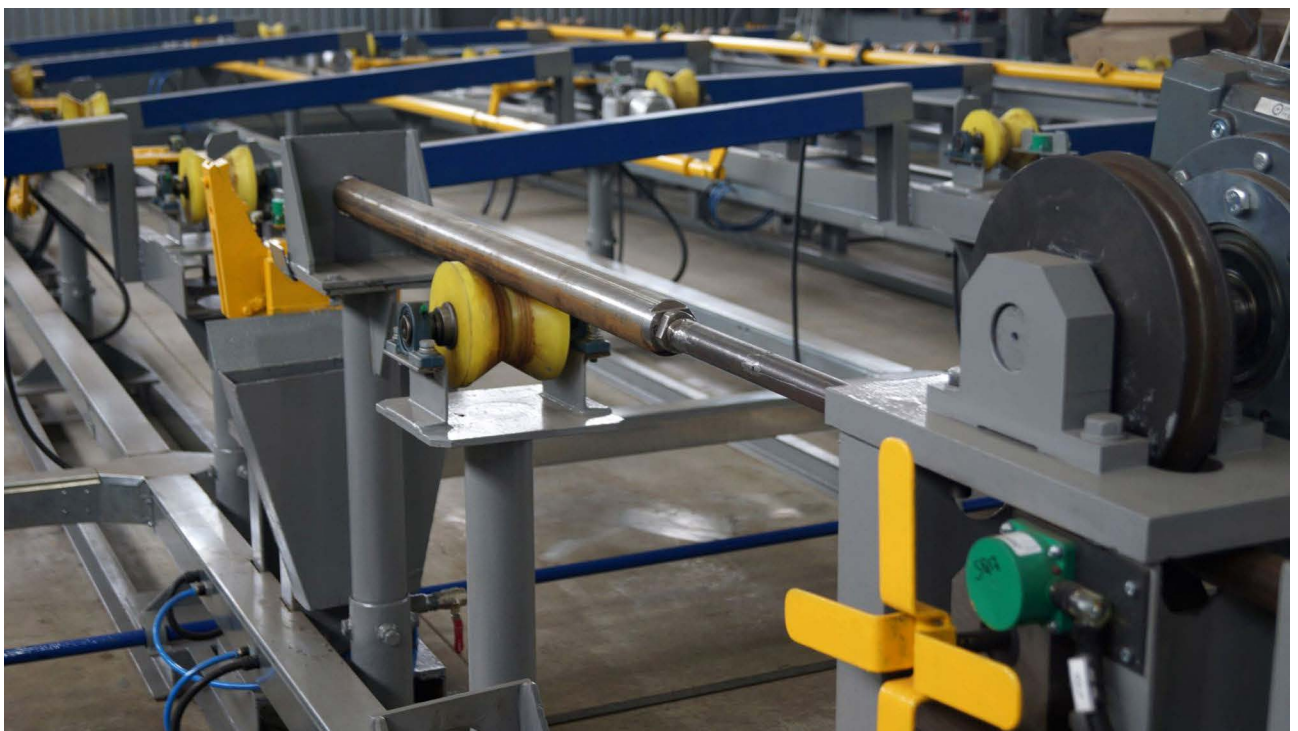

Installation of patterning of tubing pipes

Installation kit:

- Frame of Installation;
- Drive of pattern;
- Template centering;
- Capture pipes;
- Overloading conveyor;
- A set of templates (for tubing 60.3; 73; 88.9);
- Control remote;
- Electro / Pneumatic equipment;
- Passport and operation manual.
control remote.

Overloading conveyor



Drive of pattern



Technical Specifications:

Mode of operation.....	Auto
Diameter of pipes to be processed, mm.....	60, 73, 89
Tubing length, mm.....	6 500 – 10 500
Number of simultaneously processed pipes, pcs.....	1
Productivity, pcs / hour.....	40
Power supply, V / Hz.....	380/50
Working pressure in the pneumatic system, atm.....	6,0
Overall dimensions, mm, (without control panel and pneumatic cabinet):	
length including roller conveyor reloading.....	24 000
width.....	700
height.....	1 200
Weight, kg.....	3 000

This product can be manufactured according to the customer's specifications, taking into account its specified parameters and features.

Food Machinery

Machinery for tires, rubber, plastics manufacturing


Modernization and automation of production

Non-standart equipment

Production of spare parts, components, assemblies

**Outsourcing services - repair and maintenance
of equipment**

Global engineering solutions

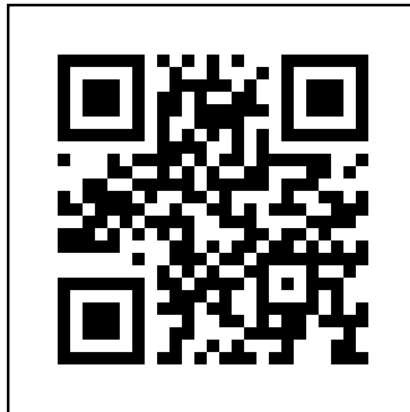

Policon JSCo

194 Lermontov Str, Omsk 644009, Russia

Tel./Fax: +7 (3812) 36 74 12, 36 74 02, 48 48 30

e-mail: info@policon-rt.ru

www.policon-rt.ru